


Important Information

- Read the instructions carefully.
- Check the product for any signs of damage and remove any protective film.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the cabinet and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.
- If the fascias are to be cut, use a saw with a fine-toothed blade ensuring that the room is well ventilated. Any cut edges should be sealed with PVA glue or silicone sealant to prevent the ingress of moisture.

Installation


Remove the fascia panel by pulling it away from the unit with equal force on both sides. Remove the doors and shelf and turn the unit upside down. Push the legs firmly into the leg sockets.



Stand the unit back on its legs against the wall. If fitting a run of units, fix them together through the gable panels ensuring that the front and top of the gables are flush. Try to hide the fixings where possible behind shelves or hinge plates.

Adjust the legs on the units until they are level. Secure the unit to the wall by drilling through the back rail. Mark the hole positions on the wall with a pencil.

Drill the wall at the marked positions with a suitable bit and secure the cabinet to the wall using correct fixings for the wall type.

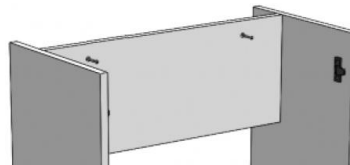

Re-fit the doors and shelf and push the fascia panel back into place.

It is good practise to run a bead of silicone where the furniture meets the floor and walls.

Door hinge adjustment


To square the door against the cabinet, turn screws A until adjusted as required.

To adjust the door closer to or further away from the cabinet, turn screws B.

To adjust the door vertically, slacken screws C. Re-tighten once the door is adjusted as required.

To remove the door hinges from the cabinet, press button D.

To remove the door hinges from the door, remove screws E.

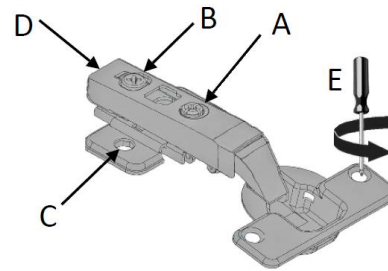

Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.


Important Information

- Read the instructions carefully.
- Check the product for any signs of damage and remove any protective film.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the cabinet and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.


Installation

Remove the top fascia panel first by pulling it away from the cabinet with equal force on both sides.

Remove the lower fascia by lifting it upwards.




Turn the unit upside down. Push the legs firmly into the leg sockets.

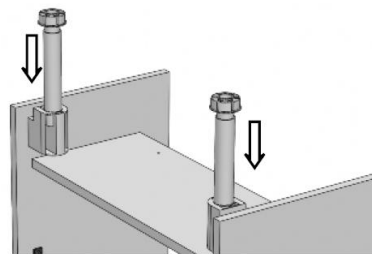

Stand the unit back on its legs against the wall. If fitting a run of units, fix them together through the gable panels ensuring that the front and top of the gables are flush. Try to hide the fixings where possible behind shelves or hinge plates.


To secure the toilet unit against the wall, screw the stretcher plates to the gables of the cabinet. Ensure that the screws used are suitable for the thickness of the cabinet.

Mark the position of the holes in the stretcher plates on the wall. Drill the positions marked with a suitable drill bit. Fasten the unit in position through the stretcher plates using fixings suitable for the wall type.



To cut the lower front panel to accommodate the toilet soil pipe and cistern flush pipe, use a jigsaw with a fine-toothed blade suitable for timber. Ensure that the room is well ventilated when cutting the material.

All cut edges must be sealed with paint, PVA glue or good quality sanitary grade silicone sealant to prevent the ingress of moisture.



Replace the panels on the toilet unit, fitting the lower fascia first. It is good practise to run a bead of silicone where the furniture meets the floor and walls.

Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.

Installation Guide


Symmetry Fitted Single Base Unit

Important Information

- Read the instructions carefully.
- Check the product for any signs of damage and remove any protective film.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the cabinet and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.


Installation

Remove the door and shelf and turn the unit upside down. Push the legs firmly into the leg sockets.



Stand the unit back on its legs against the wall. If fitting a run of units, fix them together through the gable panels ensuring that the front and top of the gables are flush. Try to hide the fixings where possible behind shelves or hinge plates.

Adjust the legs on the units until they are level. Secure the unit to the wall by drilling through the back rail. Mark the hole positions on the wall with a pencil. Drill the wall at the marked positions with a suitable bit and secure the cabinet to the wall using correct fixings for the wall type.

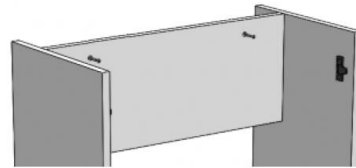

Re-fit the door and shelf and push the fascia panel back into place.

It is good practise to run a bead of silicone where the furniture meets the floor and walls.

Door hinge adjustment


To square the door against the cabinet, turn screws A until adjusted as required.

To adjust the door closer to or further away from the cabinet, turn screws B.

To adjust the door vertically, slacken screws C. Re-tighten once the door is adjusted as required.

To remove the door hinges from the cabinet, press button D.

To remove the door hinges from the door, remove screws E.

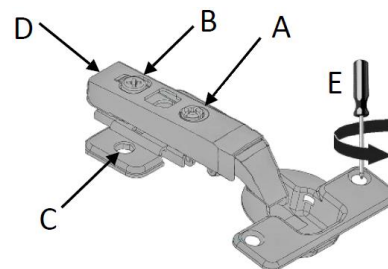

Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.


Important Information

- Read the instructions carefully.
- Check the product for any signs of damage and remove any protective film.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the cabinet and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.

Installation


Remove the door and shelf and turn the unit upside down.

Push the legs firmly into the leg sockets.

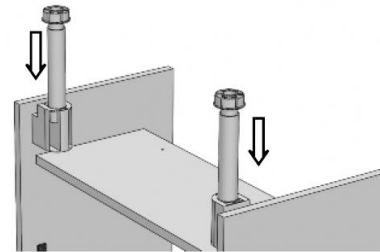

Stand the unit back on its legs against the wall. If fitting a run of units, fix them together through the gable panels ensuring that the front and top of the gables are flush. Try to hide the fixings where possible behind shelves or hinge plates.

Adjust the legs on the units until they are level. Secure the unit to the wall by drilling through the back rail. Mark the hole positions on the wall with a pencil. Drill the wall at the marked positions with a suitable bit and secure the cabinet to the wall using correct fixings for the wall type.

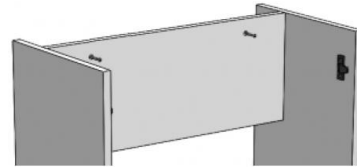

Re-fit the door and shelf and push the fascia panel back into place.

It is good practise to run a bead of silicone where the furniture meets the floor and walls.

Door hinge adjustment


To square the door against the cabinet, turn screws A until adjusted as required.

To adjust the door closer to or further away from the cabinet, turn screws B.

To adjust the door vertically, slacken screws C. Re-tighten once the door is adjusted as required.

To remove the door hinges from the cabinet, press button D.

To remove the door hinges from the door, remove screws E.

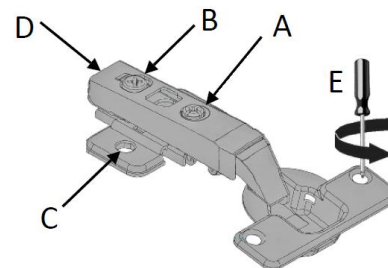

Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.

Installation Guide

Symmetry Double Base Unit


Important Information

- Read the instructions carefully.
- Check the product for any signs of damage and remove any protective film.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the cabinet and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.

Installation

Remove the door and shelf and turn the unit upside down.


Push the legs firmly into the leg sockets.

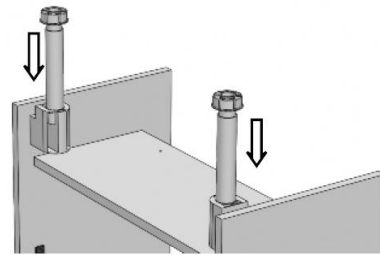

Stand the unit back on its legs against the wall. If fitting a run of units, fix them together through the gable panels ensuring that the front and top of the gables are flush. Try to hide the fixings where possible behind shelves or hinge plates.

Adjust the legs on the units until they are level. Secure the unit to the wall by drilling through the back rail. Mark the hole positions on the wall with a pencil.

Drill the wall at the marked positions with a suitable bit and secure the cabinet to the wall using correct fixings for the wall type.

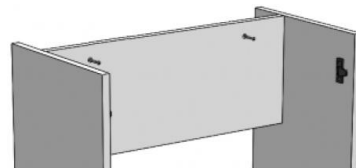

Re-fit the door and shelf and push the fascia panel back into place.

It is good practise to run a bead of silicone where the furniture meets the floor and walls.

Door hinge adjustment


To square the door against the cabinet, turn screws A until adjusted as required.

To adjust the door closer to or further away from the cabinet, turn screws B.

To adjust the door vertically, slacken screws C. Re-tighten once the door is adjusted as required.

To remove the door hinges from the cabinet, press button D.

To remove the door hinges from the door, remove screws E.

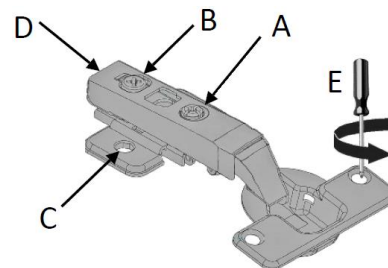

Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.

Installation Guide

Symmetry Toilet Unit


Important Information

- Read the instructions carefully.
- Check the product for any signs of damage and remove any protective film.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the cabinet and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.

Installation


Remove the top fascia panel first by pulling it away from the cabinet with equal force on both sides.

Remove the lower fascia by lifting it upwards.




To secure the toilet unit against the wall, screw the stretcher plates to the gables of the cabinet. Ensure that the screws used are suitable for the thickness of the cabinet.

Mark the position of the holes in the stretcher plates on the wall. Drill the positions marked with a suitable drill bit. Fasten the unit in position through the stretcher plates using fixings suitable for the wall type.



To cut the lower front panel to accommodate the toilet soil pipe and cistern flush pipe, use a jigsaw with a fine-toothed blade suitable for timber. Ensure that the room is well ventilated when cutting the material.

All cut edges must be sealed with paint, PVA glue or good quality sanitary grade silicone sealant to prevent the ingress of moisture.



Replace the panels on the toilet unit, fitting the lower fascia first. It is good practise to run a bead of silicone where the furniture meets the floor and walls.

Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.