

# Installation Guide


## Geo Store Unit

### Important Information

- Read the instructions carefully.
- Check the product for any signs of damage and remove any protective film.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the cabinet and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.


### Installation

It may be necessary to snap the wall plate in half at the marked line to create two wall brackets. Mark a horizontal line on the wall at the required height X---X. Ensure that the wall brackets will fit inside the width of the cabinet and are equally spaced to ensure even distribution of weight. Secure the wall brackets to the wall using suitable fixings.



Hook the unit onto the wall brackets ensuring that the brackets are securely located.

To alter the position of the cabinet on the wall, adjust the two screws in each hanging bracket. The top screws will move the cabinet closer to or further away from the wall. The lower screws will move the cabinet up and down.




For extra stability, fit extra fixings through the stretcher plates on the underside of the top panel into the wall. This will prevent the unit from being lifted up and away from the wall.

### Drawer Adjustment

To replace the drawer box, pull the runners out. Sit the drawer box onto the runners. Close the drawer and a click will be heard as the drawer box engages.

To adjust the drawer front left to right, use a screwdriver to rotate the screw in the side towards the front of the drawer box.

To raise or lower the drawer front, use a screwdriver to rotate the screw in the side towards the rear of the drawer box.

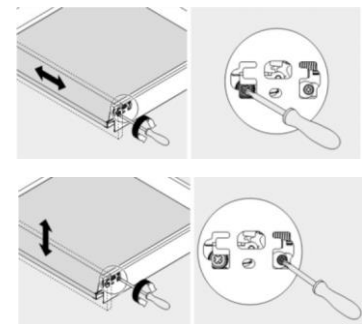

### Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. Glass or mirrored panels should be cleaned using a non-solvent based glass cleaner and a soft cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.

# Installation Guide

## Geo Towel Bracket

---

### Important Information

- Read the instructions carefully.
- Check the product for any signs of damage.
- It is recommended that a technically competent installer undertakes installation.
- It is the installer's responsibility to carry out a thorough assessment of the wall type and the weight of the product and use appropriate fixings.
- Care should be taken when drilling walls to avoid any hidden wires or pipes.

**Note:** these towel brackets do not offer any support to a worktop or Geo washbasin. The weight must be supported by the special brackets supplied with the worktop or washbasin.

This towel bracket is secured to the wall only. Under no circumstances should fixings be attempted to be fitted into the worktop or washbasin.

### Installation

Offer the towel bracket up to the underside of the worktop or basin.

Using a pencil, mark the position of the fixing holes onto the wall.

Using a drill bit suitable for the wall type, drill the positions marked.

Secure the towel bracket to the wall using suitable fixings (not supplied).

Place a self-adhesive cover cap over each screw hole.

### Care & Maintenance

Furniture should be regularly dusted with a soft cotton or micro-fibre cloth. For more thorough cleaning, occasionally wipe your furniture with a soft cloth dampened with a mild detergent solution. Surfaces should be thoroughly dried with a lint free cloth to prevent watermarks. Under no circumstances should solvent cleaning agents, bleach or abrasive cleaning agents or cloths be used. Spills should be removed immediately using a clean cloth. Glass or mirrored panels should be cleaned using a non-solvent based glass cleaner and a soft cloth. All bathroom furniture will deteriorate through prolonged periods of exposure to high levels of condensation so bathrooms must be adequately ventilated using suitable extraction. Failure to ensure adequate ventilation may invalidate your guarantee.